


THE MOBILE RANGE FOR WIND TURBINES

# DATASHEET

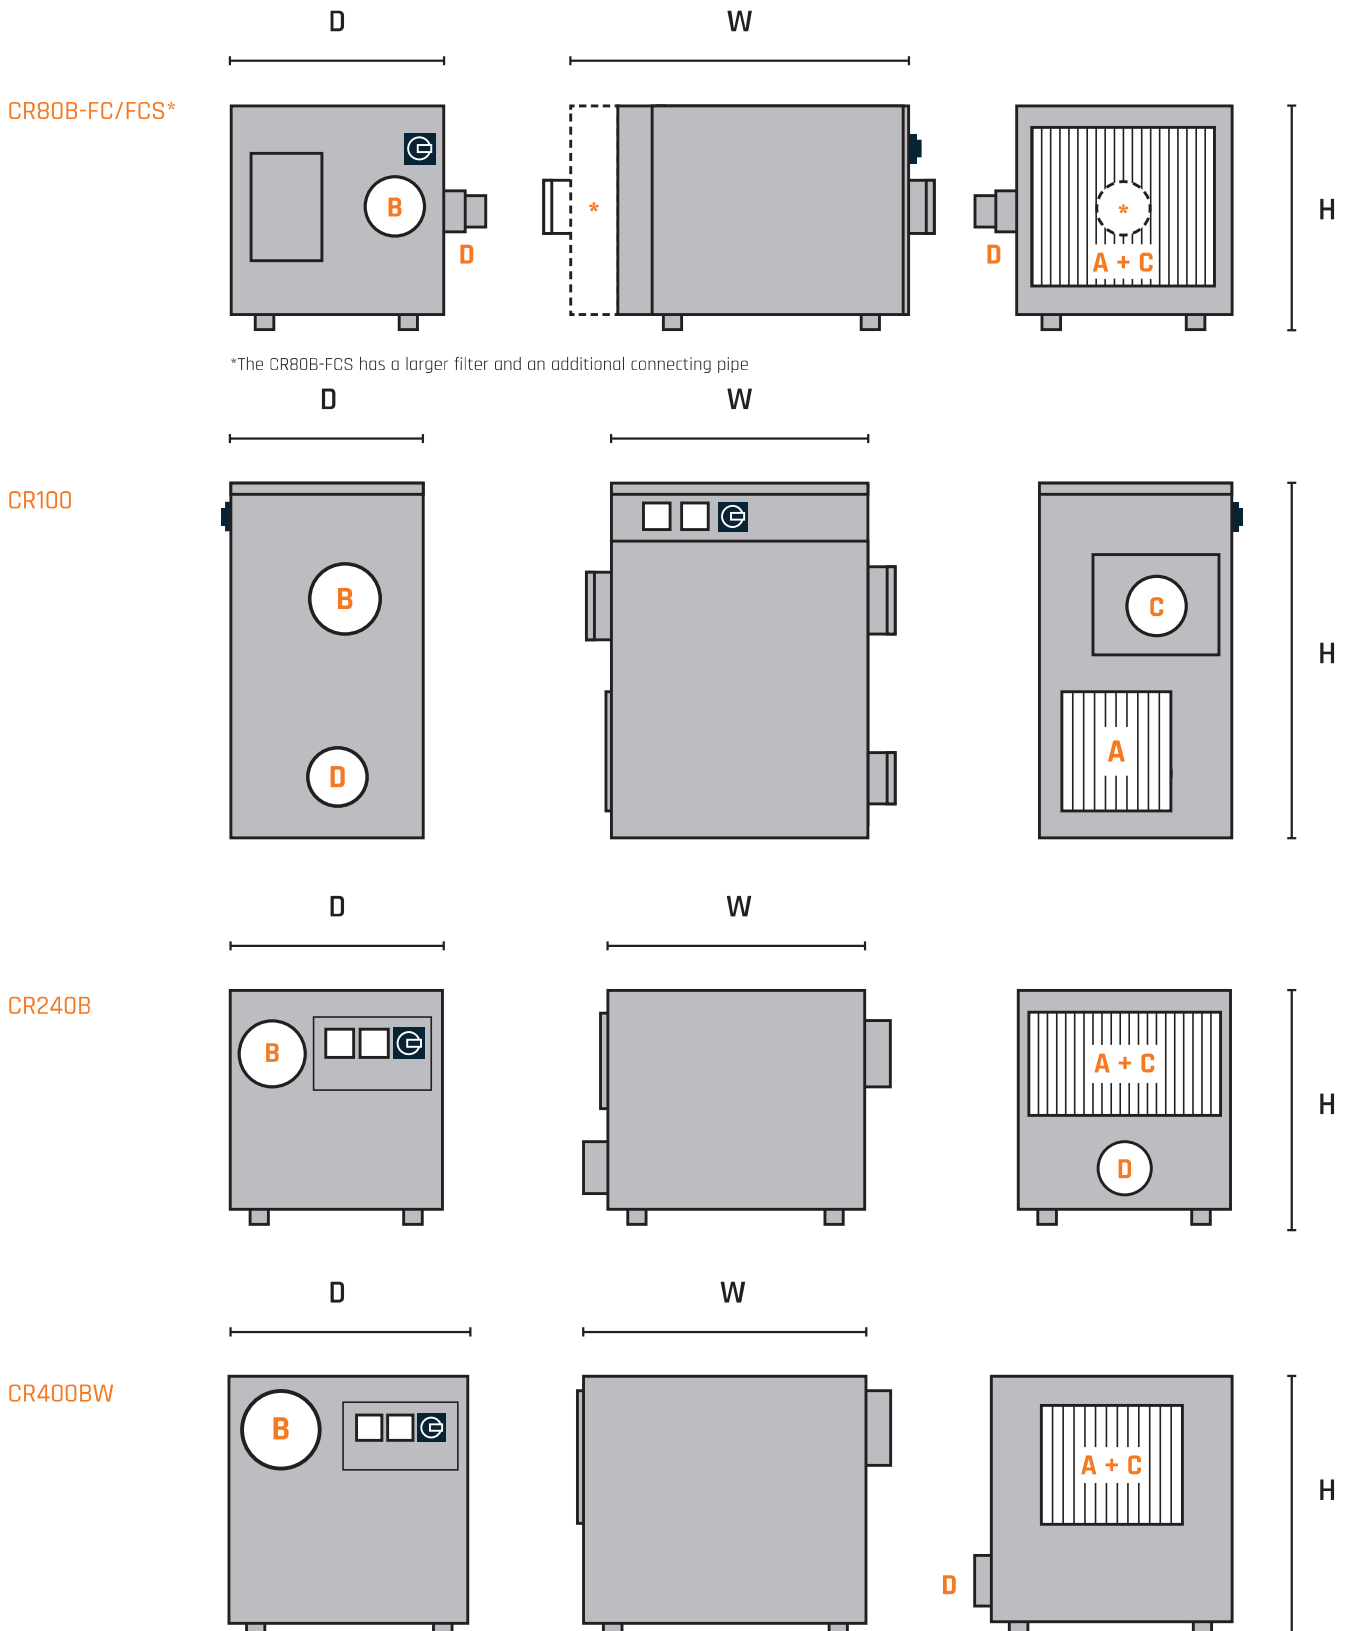

## THE MOBILE RANGE FOR WIND TURBINES

# TECHNICAL DATA

Performance data is based on nominal conditions 20°C, 60%RH.

THE MOBILE RANGE					
		CR80B-FC/FCS	CR100	CR240B	CR400BW
<b>TECHNICAL DATA</b>					
DRY AIR	m <sup>3</sup> /h	80	100	240	400
REGENERATION AIR	m <sup>3</sup> /h	40	40	40	90
SUPPLY/PHASES	V/PH	230V PH+N+PE	230V PH+N+PE	230V PH+N+PE	230V PH+N+PE
CONNECTED LOAD	kW	0.83	1.00	1.05	1.97
REGENERATION AIR HEATER	kW	0.77	0.94	0.94	1.84
RECOMMENDED EXTERNAL FUSE	A	10	10	10	10
EXT. PRESSURE PROCESS AIR	Pa	50	150	50	50
EXT. PRESSURE REGENERATION AIR	Po	60	140	50	50
MOISTURE REMOVAL CAPACITY	kg/h	0.44	0.6	0.8	1.4
<b>DIMENSIONS AND WEIGHT</b>					
W WIDTH	mm	422/494	373	505	620
D DEPTH	mm	313	291	335	405
H HEIGHT	mm	317	520	360	430
WEIGHT (ELECTRICAL)	kg	15	21	19	28
<b>DUCT CONNECTIONS</b>					
A PROCESS AIR INLET	mm	231 x 257	180 x 200	160 x 290	210 x 350
B PROCESS AIR OUTLET	mm	231 x 257	Ø93	-	-
C REGENERATION AIR INLET	mm	Ø80	Ø93	Ø100	Ø125
D REGENERATION AIR OUTLET	mm	Ø50	Ø73	Ø80	Ø80